

SAND AND DUST TEST CHAMBER



+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village , Delhi-110036 :





Sand and Dust Test Chambers are precision-engineered to replicate real-world scenarios, allowing you to thoroughly assess the durability and reliability of your products in extreme dust and sand environments. These test chambers are ideal for a wide range of industries, including Automotive, Electronics, Aerospace, Optics and Displays, Coatings, Solar Energy, etc. ensuring that your equipment remains functional and safe even in the most demanding conditions.

Our unwavering commitment to quality and innovation. Our **Sand and Dust Test Chambers** are built with advanced features, including precise temperature and humidity control, uniform dust distribution, and user-friendly interfaces for easy operation. With our **Dust Test Chambers**, you can conduct comprehensive tests, ensuring that your products meet stringent industry standards and regulations.

Moreover our **Sand & Dust Test Chambers** are supplied with fully programmable control systems to ensure the perfect test environment. These **Sand Test Chambers** are also fitted with full measurement systems to measure the Sand & Dust fallout rates, as well as the air-flow rate.

We take pride in our customer-centric approach, **offering Customized Sand & Dust Test Chambers to match your unique testing requirements**. Our experienced team is dedicated to providing exceptional support and guidance throughout your journey with our Sand and Dust Test Chambers, from selection to installation and beyond.

SALIENT FEATURES:

- Exhaust with Cleanable Filter
- 16 Gauge Stainless Steel Interior
- Full-Opening Front Loading Door
- Wind Speed Control & Display Unit
- Dust Concentration Control & Display Unit
- Colour touch panel.
- HMI+PLC in one unit
- Door open and Door close alarm system.
- Inbuilt calibration system.
- Separate Inbuilt printer for printing graph (optional).

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



- **CFC FREE REFRIGERATION UNIT:**
- **Less use of Electrical and Mechanical Components on the Top and Bottom of Chamber** - Provides easy maintenance of chamber, increases durability because of proper air circulation; cooling systems kept at bottom of the chamber to provide proper environment for compressor.
- **Full opening Door with Silicone Gaskets and Hinged on Left Side** - Allows ease of complete access to the chamber and opening of door with less force; durable silicon gasket reduces temperature loss.
- **Heated Viewing Window** - Heated viewing window allows viewing fog generated and proper viewing of the test sample.
- **Circulation Fan with Variable Speed :-**
 - **Electrical efficiency** :Variable speed motor saves money by reducing energy bills, as it consumes less electricity than conventional motor.
 - **Cooling Efficiency** : Variable speed enables gaining air conditioning efficiency or SEER.
 - **Air Quality** : Variable speed motor helps clean the air efficiently. When the fan is in constant operation (indicated by the "Fan" setting on thermostat), the motor continues to slowly circulate air, allowing filters to capture more contaminants.
 - **Humidity Control** : Variable speed motor combined with a Thermostat allows controlling the amount of humidity.
 - **Quieter Operation** : Variable speed blower motor are significantly quieter than its single-speed counterpart.
- **Air Cooled Refrigerated System** - Air cooled refrigeration system offer various benefits like
 - Low fan power consumption
 - Resistant to corrosion and freezing conditions
 - Requires very low maintenance
 - Guaranteed long life operation

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



- **PCRC Sheet Body** - Powder coated steel body assures corrosion resistant chamber and allows working of chamber at high temperature applications.
- **Digital Output** – Target and Performance Output of the chamber operations are in digital format (digits) giving precise reading.
- **Pre - Attached Data Logger with Data Analysis Software** - Primary benefits of using data loggers is to automatically collect data 24-hour basis. Graph and table format of results can be produced automatically by the data logging software.
- **Self - Calibration System** - HAPTEN incorporate a self-calibration system, in each Sand & Dust Test Chamber, that is completely automatic to prevent errors that could result from failure to calibrate. The system continuously monitors the environment, sensing changes that could affect analysis, and re-calibrates accordingly using a built-in long-life calibrator The process takes just a few seconds, without operator intervention or additional supplies, quickly optimizing system parameters for the current conditions.
- **Open and Close Updates Through Mobile Network** - Mobile technology has the potential to make services more flexible and keep informed, information anywhere at any time from mobile device, and can set alert system to know whether or not the chamber is being used.
- **Reliable** – Construction, performance mechanism, controls and information system integration makes the Sand & Dust Chamber reliable.
- **Precise Control of Environmental Parameters** - The set/ programmable parameters of the chamber are precise or have less deviation from original value, thus ensuring correct measurement.
- **Micro - Processor Based Controller** – Microprocessor based controller enables precise control of temperature, humidity, pressure and other values. Benefits:
 - Processing speed is high
 - Provides flexibility to alter the system by changing software.
 - Compact in size.
 - Operation and maintenance easier.
 - Maintain precise values

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :





- **Aesthetically designed** - Designed according to the standards and principles underlining industry's aesthetic values.
- **Corrosion Resistant interior and exteriors** - Corrosion resistant coatings like epoxy coatings are applied inside and outside the chamber to prevent against degradation due to moisture, salt spray, oxidation or exposure to a variety of environmental or industrial chemicals/ corrosive agents.
- **Energy Efficient** –Sand Test Chamber uses less energy to provide the same level of performance, comfort and convenience, thus making it energy conserving chamber.
- **CFC - free cooling** - The air cooled refrigerator use CFC (chlorofluorocarbon)-free refrigerants those are ozone friendly and eco-friendly.
- **Sturdy Construction** - Dust Test Chambers are built with robustness to withstand stress and strain, giving the chamber long life and ability to perform in extreme stress environments.
- **Low Maintenance** – Our systems benefit in retaining proper functionality over long period of time.
- **Light Weight:** Compact and superior materials ensure the chamber be light weight

OPERATING PRINCIPLE:

Pulses of compressed air are blown through a manifold located in the bottom of a collection trough, forcing dust up and over the product. Air pulses are time-programmed for “on” and “off” cycles. Concentration of dust can be easily varied by changing the air pressure and the amount of the blowing time.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



CONSTRUCTION DETAILS :

Sand and Dust Test Chambers are double walled convection heated and cooled units. Outer body of our environmental chambers are constructed out of thick PCRC, pre coated corrosion resistant GI sheet duly pre-treated with primers and rust proofing and painted with long lasting stove enamel or elegantly powder coated. The inner chamber is made of heavy gauge stainless steel sheet of SS-304 grade). The gap between the walls is filled high grade mineral glass wool, which ensures maximum thermal efficiency in our chambers.

These Dust Test Chambers are provided with single door, with viewing window made of thick plexi glass /float glass, to view the specimens, without disturbing the temperature of the chamber. This door is provided with magnetic door closer. This door is provided with lock and key arrangement. The unit is mounted on a sturdy steel frame. The unit is provided with various customized shelves in various permutations and combinations to suit individual requirements. The triple walled back of our sand and dust test chambers are provided with two/Four/Six/Eight (size specific) air circulation fans for uniform maintenance of the temperature throughout the chamber.

HMI+ PLC IN ONE UNIT:



We provides better automatic controls for the Sand & Dust Test Chamber by integrating HMI and PLC together. This special feature is compelling alternative to traditional methods and provides a simplified, reduced cost control system architecture. It works by following operating steps:

- Sensors measure the physical quantity like temperature and convert them to electrical signal
- The actuation device acts upon that electrical signal
- At HMI interface between operator and chamber occurs.
- The machine operates with the logic design controls controlled by software.
- This signal is sent to the chamber by logic control devices and the chamber operates.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



Basic features of HMI+PLC:

- **Processor of 1.6 GHz:** High clock speed processing PLC that enables speed up processing to the functions. With 1.6GHz processing speed, the PLC system is capable of multitasking, processing of large data volume, and high performance.
- **Audio Output Alarm:** Audio alarm alert in case of failures in any of the component controlling functions.
- **256 MB of RAM:** PLC of 256Mega Byte memory for running programs offers high memory space for installing of more programs
- **COM Port:** Com port provided for attaching RS 235/RS 485 cable.



- **USB Ports:** A USB port provided for transferring data through communication between HMI and PLC. Various peripherals can be connected via USB hub.



- **Coloured Touch Panel:** We provide coloured touch panel screen available in 2 sizes -7 inches and 10inches, displaying all the control features, digital clock, sensor layouts, data and values, graphics and pictures, navigations etc.
- **RS232 or RS485 Interface:** Serial interface provided to get connectivity with internet, mobile and other data transmission. Single device to device interface and a communication bus that is used to form simple networks of multiple devices are available through RS485 interface. RS485 interface supports transmission speed of 2400, 4800, 9600, 19200, 38400 bits per second.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



Through Ethernet communication module, AC Drives, temperature controller and other industrial automation products can be connected quickly.



(AC Servo Drive)

(Temperature Controller) (VFD- Vehicle Force Drive)

- **Touch Screen Size of 7 Inches and 10 Inches:** HMI screen available in 2 sizes- 7inches and 10inches, as per user's requirement. Screen displays the control features, images, data values and other programs.
- **Expandable Memory with a SD Card:** SD card plugged in appropriate slot for more memory requirement that will be read and used as part of device; for long storage requirements SD card may be added and store data with expanded memory.



- **High Resolution Brilliant TFT Displays, 64k Colour:** HMI screen displays 64000 different colour with good resolution, allowing large number of distinguished colour, easy to establish and work with. It shows entire new 2D drawing technique, the screen resolution enhanced for more realistic images and more colour and vivid displays.

+91-9821075632 / +91-8373988100 :




info@haptenbiotech.com :




Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



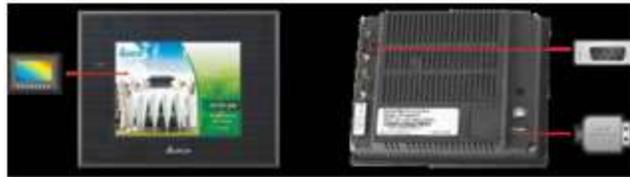

- **Software Supports All Six IEC 61131 Programming Languages:** Software supports all the six programming languages under international standard IEC 61131: Function Block Diagram, Ladder Diagram, Structured Text, Sequential Function Chart, Instruction List, and Continuous Function Chart.
- **E-remote Control Software:** E-remote enables viewing the monitor and same screen shown on HMI at the production site, and control the manufacturing process via Ethernet.

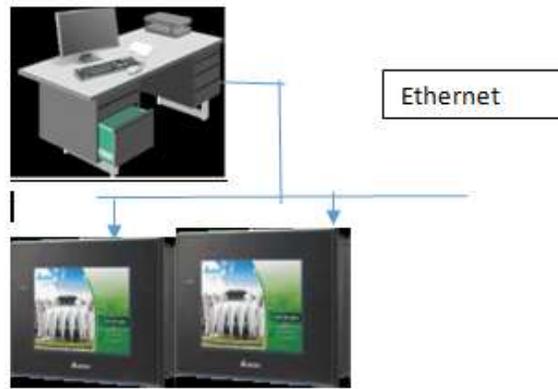

- **A set of Trouble Shooting Tools:** 3 troubleshooting tools provided with in the software
- Simulation- Imitation of a situation as real situation
- Debugging- Finding and reducing number of defects.
- Online changes- Like change of IP address can be made online. Manual to operate the programs on request.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :




Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



- **Increased Numbers of On - Board I/O peripherals (10-50):** Maximum number of 50 I/O peripherals provided on request, to attach input and output devices to the HMI and PLC. Increased number of input and output peripherals allows adding of devices like printers, recorders, etc., as per the need.
- **Data Logging and Free Programming Software:** Attached data logger with input program software provided. Through data logging software, HMI and PLC collect data through sensors, analyse the data and save and output the results of the collection and analysis. Examples of the types of information a data logging system can collect include temperatures, sound frequencies, vibrations, times, light intensities, electrical currents, pressure and changes in states of matter.

CoDeSys (Controller Development System) software technology

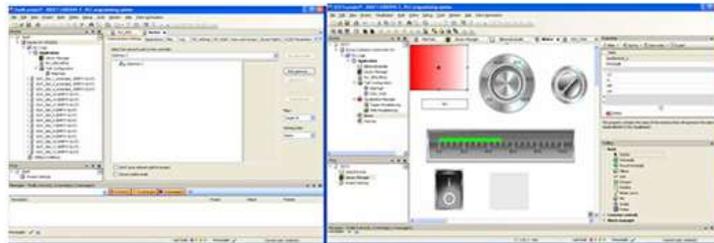

Software Screen Shot



Heating:

Indirect heating system is provided in our units, comprising of air heaters made of high grade Kanthal A-1 wires of suitable wattage. The warm air is evenly distributed throughout the chamber through efficient motor fans ensuring very good temperature sensitivity.

Cooling:

An energy efficient cooling unit is installed in our photo stability test chambers to enable studies at lower room

+91-9821075632 / +91-8373988100 : 

info@haptenbiotech.com : 

Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 : 

temperatures. We use high end CFC free compressors of Copeland / Kirloskar / Tecumseh / Bitzer / Danfoss make, on forming to latest international standards and guidelines.

DETAILED DESCRIPTION ALONG WITH SALIENT FEATURES ARE AS UNDER FOR REFRIGERATION MACHINE:

CONDENSING UNIT

AIR-COOLED CONDENSOR

Air-cooled condenser is internally grooved finned copper tubes used for high heat transfer area, which not only reduce power consumption, but also bring down the condensation faster. This unit is designed to reduce the resistance, saves energy consumption and ensure good heat exchange.

COMPRESSOR:

- **HERMETIC COMPRESSOR** : Single stage Reciprocating Compressor. Give the High Efficiency compared to sealed compressors, Less Power Consumption , Accessible for repairing, low noise level, Less Vibrations, Wide Voltage Range, Designed for Extremely High Ambient ,Full warranty etc
- **COOLING SYSTEM** : The compressor is mounted perfectly to ensure recommended level of sound and vibration.

REFRIGERATION CONTROL

- **Low and High Pressure switch of RANCO/Danfoss** : Which ensures the compressor and refrigeration system when low pressure will occurs it trip off the compressor. This is the only operator friendly switch can easily reset.
- **Hand Shut off Valve** : Is the only Condensing Unit, which is equipped with it. This valve is used for pump down the total gas in to the condenser & receiver in the faulty condition.
- **Liquid Dryer of Danfoss make** : Which is equipped in the liquid line for ministration of moisture in the liquid. It will collect all the moisture in side the refrigeration line as well as gas.
- **Moisture Indicator of Danfoss make** : The sight glass area in the Moisture Indicator shows at a glance the condition of the refrigerant system. The moisture indicator element changes colour and indicate if the system is safely dry, or dangerously wet.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village , Delhi-110036 :



- **Solenoid Valve of Castle make** : In most refrigeration applications, in order to automatically control the flow of fluids in a system, it is necessary to be able to start or stop the flow in the refrigerant circuit. An electrically operated solenoid valve is usually used for this purpose. Its basic function is the same as a manually operated shutoff valve, but it can be positioned in remote locations, and may be conveniently controlled by simple electrical switches.
- **Oil Separator of Stainless Steel 304** : The oil separator intercepts the oil mixed with compressed gas and returns it into the crankcase of the compressor, thus assuring an efficient lubrication of its moving parts. Also, it improves the overall efficiency in the system.
- **Suction Accumulator**: Maximum Efficiency of the relief device (expansion valve) because it is supplied with sub cooled Liquid.
- **Liquid Receiver** :As per ASME Section VIII Division I for storage of refrigerant.

Humidity Range : 20% to 85%RH

Humidification (WATER TANK AND AEROSOL SYSTEM)

A low-pressure droplet free vapour boiler using direct vaporization system is used. Water Reservoir is provided at the side of the chamber with a 10 x 8mm PU tube quick connector and water level is automatically controlled through a water-in solenoid valve. The wick tank water level is automatically maintained through a water solenoid valve and an electrical float switch. The de-mineralized water or single distilled water supply to the humidity inlet having a resistance measurement of approximately 50,000 – 200,000 Ohm/cm is provided with the unit

Aerosol Generator and Monitor is a multi-function aerosol instrument comprised of an atomizer aerosol generator. As an aerosol generator can be used to generate a mono disperse aerosol by atomization. The output aerosol concentration is continuously monitored by control facility to provide a stable aerosol output with a known particle size and a known aerosol concentration from 10nm to1000nm. Water Reservoir is provided at the side of the chamber with a 10 x 8mm PU tube quick connector and water level is automatically controlled through a water-in solenoid valve. The wick tank water level is automatically maintained through a water solenoid valve and an electrical float switch. The de-mineralized water or single distilled water supply to the humidity inlet having a resistance measurement of approximately 50,000 – 200,000 Ohm/cm is provided with the unit.

+91-9821075632 / +91-8373988100 :




info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



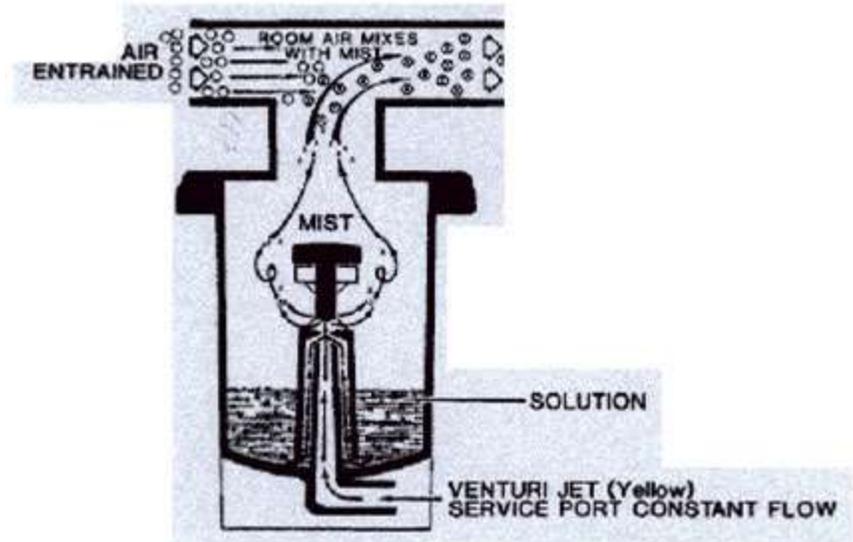

- **Dehumidification:** Refrigeration based de-humidification system is used. The desired level of lower humidity will be achieved by maintaining the precise dew point temperature. If you need more low humidity than the standard range then refrigeration based dehumidification system can be incorporated on customer's request.
- **Humidity Sensitivity:** Humidity is controlled by mean of an electronic humidity controller cum indicator with an accuracy of $\pm 3\%RH$
- **Temperature Control:** The temperature inside our temperature and humidity control test chambers is controlled through Nano technology based HMI & PLC controller.
- **Temperature Range:** Temperature range of our standard Chamber is $-2^{\circ}C$ to $+40^{\circ}C$. . However we have the capacity to modify the same to suit the individual specialized requirements of our customers.
- **Temperature Sensitivity:** Temperature inside our Temperature And Humidity Control test chambers are controlled with a sensitivity of $+ 0.3^{\circ} C$ or better.
- **Illumination:** Our Temperature and Humidity Control test chambers are provided with door operated illumination system comprising of fluorescent lights, beside two panels of diffused fluorescent light panel located at the either side of the chamber to enable the user to conduct the photo periodic tests and experiments.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :



- **Insulation:** The gap of 75 mm between the outer and the inner wall is filled with special grade glass wool to prevent thermal losses.
- **Mineral Glass Wool Insulation:** Glass mineral wool is one of the most environmentally friendly, stable and sustainable insulates available. Glass wool is incombustible by nature. Euro class classification is A. It does not propagate flames and toxic smokes. Thanks to a dense entanglement of materials with a low conduction and trapping a great amount of air, glass wool is an excellent thermal insulant. The thickest it is, the best thermal resistance it has, thus reducing heat losses in our equipment's for better sensitivity and economical operations. And its impact on the environment in manufacture, use and disposal is minimal.
- **Air Circulation:** Triple walled back of unit is fitted with two air circulation fans for maintaining temperature uniformly throughout the chamber

Features of Coaxial Circulation Fan:

- Vacuum impregnated stator winding with dr. back varnish under red bectol
- Non-hygroscopic.
- Best IR value
- Bright bar (EN - 8 class) shaft.
- Bush bearing of branded companies.
- Surge comparison testing in fans and pumps eliminates into turn short circulating of the stator.
- Pressure die-casted-rotor manufactured with zero error.
- Boats of high accuracy

Doors: Full view inner glass/Perspex door permits inspection of specimens, without disturbing the chamber temperature. Lock and Key arrangement is provided in the double walled outer door.

Voltage: To work on 220/230V A.C. supply.

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village , Delhi-110036 :



Port hole: port holes with silicon enclosure is provided at back side of the chamber. Through the port hole you can input sensors, wires and other test equipment. Silicone foam plugs have excellent temperature and humidity resistance and offer very good thermal insulation. Generally a single port hole is given but more numbers can be increased according to customers request.

TECHNICAL SPECIFICATIONS:

MODEL	HB-SDTC1088
Temperature Range	23-70 °C
Humidity Range	30% RH
Exterior Dimensions	(WxDxH) 4700 x 2200 x 2500 mm (customizable)
Interior Dimensions	(WxDxH) 1000 x 800 x 800 mm (customizable)
Stone Powder Quantity	2kg~4kg/m ³
Controller	microprocessor programmable integrated controller
Mesh Diameter	50um
Wire Spacing	75um
Access port hole	50 mm (optional)

+91-9821075632 / +91-8373988100 :



info@haptenbiotech.com :



Plot no. 38 , Kh No 52/5 , Nangli Poona Village ,Delhi-110036 :

